



PRODUCT SUMMARY

- ▶ A guide to high performance industrial and commercial flooring systems available from Flowcrete UK.

Welcome to Flowcrete UK

Looking for a flooring solution that meets the demands of an industrial manufacturing environment? Or, alternatively, for a floor finish for a commercial space that makes a bold design statement underfoot?

Achieving the correct balance between aesthetics, performance, cost, longevity, durability and installation requirements is often hard to juggle — that’s where we come in!

Flowcrete UK is a world leader in the manufacture of seamless resin flooring, wall and coving solutions as well as other specialty. We have built up a reputation as the flooring specialist, with a passion for developing solutions that achieve the demanding service conditions and performance criteria required by the industrial manufacturing sectors, as well as floor finishes that create a welcoming environment in commercial spaces.

Our passion for achieving excellence in flooring technology means that not only are our floor finishes of the highest quality, but we can also provide the right tools to support and maintain your floor. Our range of flooring solutions also includes a comprehensive range of grouts & mortars, adhesives, compounds & resins, protective coatings.

Accreditations & Awards



Flowcrete UK is a leading manufacturer of polyurethane and epoxy resin floor coatings and specialist adhesives, mortars and grouts across UK.

Our products come backed by industry experts and have been awarded a range of accreditations for their excellence, offering you peace of mind.

For more information visit www.flowcrete.co.uk

Application Suitability

Flowcrete UK delivers solutions suitable for a range of both commercial and industrial market sectors.

Commercial Markets



Airports



Retail



Stadiums



Education



Healthcare



Leisure



Offices



Parking Structures

Industrial Markets



Automotive



Food & Beverage



Aerospace



Pharmaceutical



Chemical



Electronic



Manufacturing



Print

Flowfresh Polyurethane*



SYSTEM NAME	THICKNESS	DESCRIPTION
Flowfresh HF	6–9 mm	A trowel-applied, heavy duty, chemical resistant antimicrobial treated polyurethane resin floor screed. Attractive fine textured coloured floor finish with a speckled effect on the surface. Ideal for wet processing environments given its slip resistance.
Flowfresh HF LT	6–9 mm	A trowel-applied, heavy duty, chemical resistant antimicrobial treated polyurethane resin floor screed. Attractive fine textured coloured floor finish with a speckled effect on the surface. Ideal for wet processing environments given its slip resistance and low temperature applications (<15°C).
Flowfresh MF	4–6 mm	A self-leveling, heavy duty, chemical resistant antimicrobial treated polyurethane resin floor screed. Attractive smooth matt coloured finish, easy to clean. Ideal for use in medium duty dry processing environments including packaging areas.
Flowfresh SL	2 mm	A slurry-broadcast, highly durable, chemical resistant antimicrobial treated polyurethane resin floor screed. Attractive smooth matt coloured floor finish with enhanced durability and anti-slip properties.
Flowfresh RT	6–9 mm	A trowel-applied, heavy duty, chemical resistant antimicrobial treated polyurethane resin floor screed. Attractive fine textured coloured floor finish with a speckled effect on the surface. Flowfresh RT is ideal for us in wet processing areas given its slip resistance.
Flowfresh SRQ	5–6 mm	A slurry-broadcast, heavy duty, chemical resistant antimicrobial treated polyurethane resin floor screed. Attractive and positively textured, coloured quartz floor finish.
Flowfresh SR	5–6 mm	A decorative, heavy duty, chemical resistant and slurry-broadcast antimicrobial treated polyurethane resin floor screed. Attractive textured coloured floor finish.
Flowfresh Primer	-	A water-based, polyurethane primer for concrete and cementitious substrates. Flowfresh Primer will bond to surface dry substrates that have a Relative Humidity up to 97%.
Flowfresh Cove Coating	-	A solvent-free, antimicrobial treated polyurethane coving system to minimise bacteria build up and ensure a seamless transition between the floor and wall.

*All Flowfresh systems are HACCP International certified and incorporate Polygiene® — an antimicrobial additive which inhibits the growth of bacteria, fungi, mould and mildew.





Flowfast Fast Cure MMA

SYSTEM NAME	THICKNESS	DESCRIPTION
Flowfast Terrosso	1–7 mm	A hard wearing, decorative and fast cure MMA flooring system made up of colour stable flakes encapsulated in a clear resin binder. Ready for use in 2 hours.
Flowfast Quartz Classic	4 mm	A hard wearing, decorative and fast cure MMA flooring system made up of colour stable quartz granules encapsulated in a clear resin binder. Ready for use in 2 hours and ideal for use in dry areas.
Flowfast Quartz Classic for Wet Areas	4 mm	A hard wearing, decorative and fast cure MMA flooring system made up of colour stable quartz granules encapsulated in a clear resin binder. It creates a textured, anti-slip and chemically resistant finish. Ready for use in 2 hours and ideal for wet areas.
Flowfast Quartz Structure	4 mm	A durable, decorative and fast cure MMA flooring made up of colour stable quartz granules broadcasted across the floor and sealed to create a satin finish. It delivers an attractive textured «scatter and seal» finish with enhanced slip resistance. Ready for use in 2 hours.
Flowfast Rapid Transit SR	5 mm	A fast track, fire-safe and fast cure MMA flooring that contains natural quartz aggregates and offers a positively textured coloured floor finish with exceptional chemical, wear and slip resistance. Ideal for areas with heavy foot traffic.
Flowfast SHF	4 mm	A slip-resistant and fast cure MMA flooring system with a light textured decorative flake finish for communal walkways and balconies in social housing developments.
Flowfast Standard Primer	-	A low viscosity MMA based primer for concrete and cementitious substrates. For general priming of concrete, screeds and wood, prior to overcoating with Flowfast resin toppings.
Flowfast Asphalt Primer	-	A low viscosity MMA based primer for concrete and cementitious substrates. For priming of asphalt/bitumen screeds, prior to overcoating with Flowfast resin toppings.
Flowfast Ceramic / Metal Primer	-	A low viscosity MMA based primer for metal and ceramic tile substrates. For priming of metal and ceramic substrates, prior to overcoating with Flowfast resin toppings.
Flowfast Damp Primer	-	A low viscosity MMA based primer designed for damp cementitious substrates. For priming of damp concrete and screeds, prior to overcoating with Flowfast resin toppings.



Industrial Resins


SYSTEM NAME	THICKNESS	DESCRIPTION
Flowseal EPW	0.12 mm	A coloured gloss finish, water based hygienic floorseal which is vapour permeable and solvent free. Suitable for use in food processing areas, kitchens, light industrial areas, storerooms, garages and areas of pedestrian and light traffic.
Flowcoat SF41	0.35 mm	A time-proven, durable, high chemical resistant epoxy floor coating system with adjustable anti-slip properties. Ideal for areas of medium duty processes.
Flowcoat SK	0.3 mm	A hygienic self smoothing resin floor finish with excellent resistance to chemicals including Skydrol hydraulic fluids. Ideal for dry process areas subject to heavy duty foot, trolley, pallet truck and rubber wheeled fork lift traffic.
Flowcoat LXP	0.7 mm	A high impact resistant, tough, self-levelling polyurethane floor coating system combining good chemical resistance and crack bridging properties. Thermal shock resistant and suitable for use at low temperature.
Flowshield SL	2 mm	A epoxy floor coating system with an attractive, seamless gloss finish. Designed for use in automotive and aviation settings where high chemical and abrasion resistance are paramount.
Flowshield LXP	1.5 mm	A high impact resistant, tough, self-levelling polyurethane floor coating system combining good chemical resistance and crack bridging properties. Thermal shock resistant and suitable for use at low temperature.
Flowshield LXP HD	1.5–3 mm	A solvent free, flexible self-levelling polyurethane floor coating system to provide an easy to clean, chemically resistant floor topping over asphalt, wood, steel and concrete.



SYSTEM NAME	THICKNESS	DESCRIPTION
Peran STB	4 mm	A decorative, hard wearing epoxy floor mortar made up of colour and durable stable quartz aggregates. Peran STB delivers a robust and matt surface suited for diverse areas including heavy-duty and wet areas with anti-slip properties.
Flowshield SK	2 mm	A hygienic self smoothing resin floor finish with excellent resistance to chemicals including Skydrol hydraulic fluids. Ideal for dry process areas subject to heavy duty foot, trolley, pallet truck and rubber wheeled fork lift traffic.
Flowcoat LXP	0.7 mm	A solvent free, flexible, coloured polyurethane-based floor coating applied in a thin layer. It is a self-levelling product that can be used on concrete, steel and asphalt surfaces where a flexible coating is required.
Peran Floor Flakes	1 mm	A decorative coating which introduces texture and vibrancy into floors. Peran Floor Flakes contains varying sizes of flakes scattered over a coloured base coat and finished with a tough resistant clear sealer (Gloss or Matt).
Flowseal ESD EPW	0.15 mm	A coloured satin finish water based electrostatic dissipating hygienic floorseal. Ideal for public areas, shops and showrooms, department stores, designer outlets, restaurants, garden centres, airports, schools and hospitals.
Flowseal ESD UV Coloured	0.3 mm	A high-grade, electrostatic dissipating, hard-wearing polyurethane floor coating designed for maximum chemical resistance which is light-fast and flexible. Ideal for areas where a longlasting, easily cleaned, high chemical resistance electrostatic dissipating finish is essential.

Mondéco Seamless Terrazzo

SYSTEM NAME	THICKNESS	DESCRIPTION
Mondéco Mirrazzo	6–7 mm	A seamless, hard-wearing, epoxy resin terrazzo floor finish containing crushed clear, coloured and mirrored glass alongside metallic particles. Mondéco Mirrazzo creates a glamorous finish underfoot, ideal for hotels, retail and restaurants.
Mondéco TZ	7 mm	A decorative, trowel-applied, granite filled antimicrobial treated polyurethane terrazzo floor finish. Mondéco TZ contains the additive Polygiene making it a hygienic flooring option and suited to use in food and pharmaceutical production and process facilities.
Mondéco Artic	6–7 mm	A seamless epoxy resin terrazzo floor finish utilising a white binder with a blend of light coloured aggregates, mirror glass & metallic particles. Mondéco Arctic offers a bright finish and a low maintenance system that creates a contemporary feel underfoot.
Mondéco Earth	7 mm	A seamless, decorative and heavy duty epoxy resin terrazzo floor finish containing attractive granite and flint aggregates. Mondéco Earth provides an easily cleaned, chemical resistant and durable floor finish suited to use in food and pharmaceutical production and process facilities. An anti-static grade is also available.
Mondéco Classic	9 mm	A seamless, decorative and durable epoxy resin terrazzo floor finish containing a blend of marble aggregates. Mondéco Classic provides a decorative floor surface in commercial environments prioritising aesthetics, wear resistance and durability.
Mondéco Crystal Ice	9 mm	A seamless, decorative and durable epoxy resin terrazzo floor finish containing a mix of clear and mirror glass aggregates. Mondéco Crystal Ice delivers a sparkling finish underfoot, ideal for commercial environments where design, wear resistance and durability are essential.
Mondéco Exotic	9 mm	A seamless epoxy resin terrazzo floor finish containing a blend of mother of pearl, marble and mirror glass aggregates. Mondéco Exotic provides a colorful floor surface in commercial environments prioritising aesthetics, wear resistance and durability.
Mondéco Rapide	8 mm	A rapid curing resin terrazzo floor finish that provides a durable, non porous and luxurious finish. Suitable for internal use in residential & commercial buildings such as museums, hotels, restaurants, airports, shopping centres and offices.

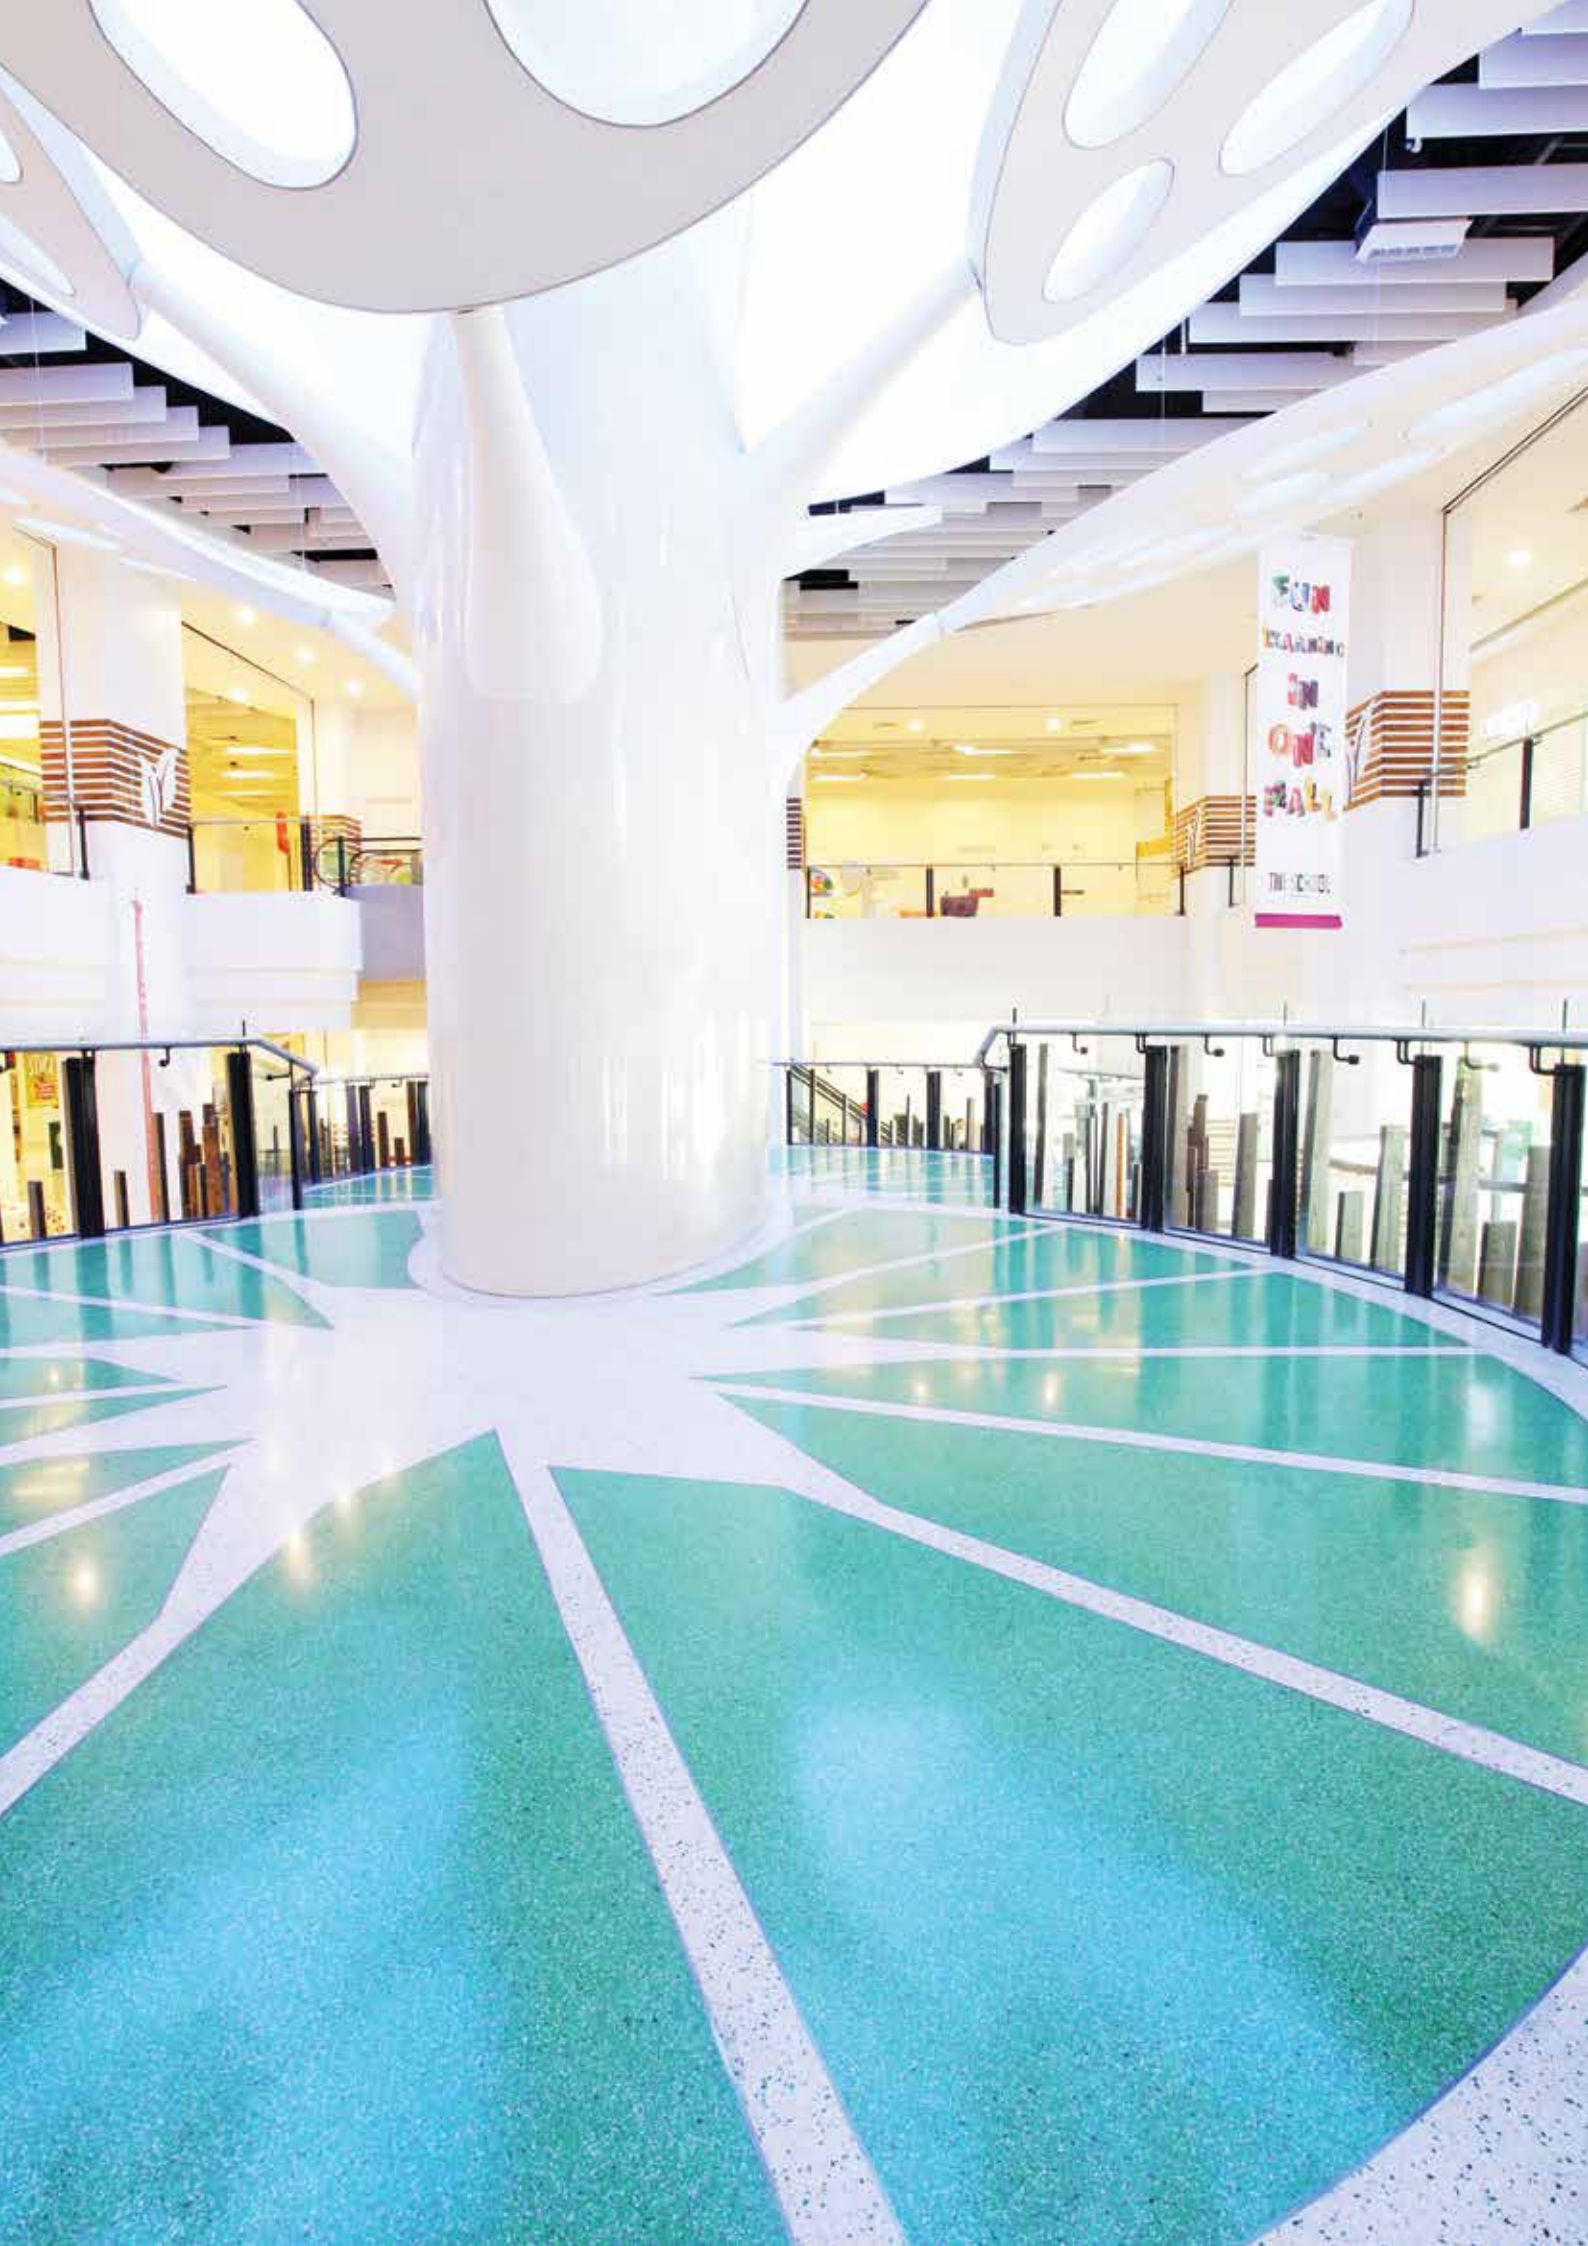

Commercial Resins

SYSTEM NAME	THICKNESS	DESCRIPTION
Peran Floor Flakes	1 mm	A decorative coating which introduces texture and vibrancy into floors. Peran Floor Flakes contains varying sizes of flakes scattered over a coloured base coat and finished with a tough resistant clear sealer (Gloss or Matt).
Peran SL	2 mm	A smooth gloss self-levelling resin floor finish ideal for a minimalist, modern, contemporary environment. Ideal for areas with intensive traffic.
Flowshield FX	2–3 mm	A solvent-free, self-levelling, epoxy resin, combined with decorative coloured particles; available in a matt finish. Ideal for areas with intensive traffic.
Peran Comfort	2–3 mm	A matt, self-levelling flexible polyurethane resin floor finish ideal for a minimalist, modern, and contemporary environment. Ideal for areas with intensive traffic.
Peran CHD	1.5–2.5 mm	A hard wearing, matt, self-levelling flexible aliphatic polyurethane coating with a clear aliphatic topcoat. Tolerant of sustained temperatures up to 40° C. Ideal for commercial environments with intensive traffic.
Flowshield Comfort	2–3 mm	A self-levelling flexible and aromatic polyurethane coating with a coloured aliphatic topcoat for a smooth surface finish. Tolerant of sustained temperatures up to 50°C. Ideal for commercial environments with intensive traffic.
Flowshield CHD	1.5–2.5 mm	A self-levelling flexible and aromatic polyurethane coating with a coloured aliphatic topcoat for a smooth surface finish. Tolerant of sustained temperatures up to 50°C. Ideal for commercial environments with intensive traffic.
Peran STB Classic	4 mm	A hard wearing, decorative resin floor topping made up of colour stable quartz granules encapsulated in a clear resin binder. A hand trowelled system with a matt finish. Ideal for use in public and dry process areas where the floor is subject to heavy traffic, impact and chemical spills.
Rustik Natural Stone	8–12 mm	A decorative stone carpet system containing natural stone aggregates which offers an attractive, slip resistant floor finish that is well suited to use in car showrooms, high end retail boutiques and lobby areas.
Naturewalk	3–4 mm	A seamless and slip resistant bonded gravel system, whereby a range of natural stone aggregates are scattered into a solvent free resin binder. Designed to ensure that walkways and external concourse areas reflect the natural beauty of the outdoors. Ideally suited to outdoor environments subject to heavy footfall.
Rustik Glamourstone	8–12 mm	Colourful pieces of marble encapsulated in a clear resin to produce an attractive slip-resistant floor finish. Ideal for use in car showrooms, retail stores, conservatories, atriums, reception halls, conference zones, use limited only by your imagination.



Deckshield Car Park Decking

SYSTEM NAME	THICKNESS	DESCRIPTION
Deckshield ID	2–3 mm	A flexible and durable polyurethane deck coating system for use on intermediate car park decks. Deckshield ID cosmetically enhances multi-storey parking environments and ensures safety underfoot with enhanced traction.
Deckshield ED	3–4 mm	A durable polyurethane deck coating system for use on external or exposed car park decks incorporating a flexible membrane. Deckshield ED provides a colourful crack bridging, waterproof wearing surface for use over exposed car park decks.
Deckshield Rapide ID	3–4 mm	A fast cure MMA deck coating system for use on intermediate car park decks. Deckshield Rapide ID ensures quick and speedy install over large areas in order to minimise any operational downtime to the structure.
Deckshield Rapide ED	4–5 mm	A fast cure MMA deck coating system for use on external or exposed car park decks. Deckshield Rapide ED ensure quick and speedy install over large areas and provides a colourful crack bridging, waterproof wearing surface for use over exposed car park decks.
Deckshield Linemarker QD	0.1 mm	A fast drying, solvent based , high build line marking product used for demarcation in parking bays and roadways.
Deckshield Rapide Linemarker	-	A fast cure MMA , high build line marking paint for fast installations. Deckshield Rapide Linemarker is used as part of the Deckshield Rapide systems.
Deckshield Rapide Topcoat	-	A solvent free, medium viscosity methyl methacrylate based coloured coating.
Deckshield Rapide Membrane	-	A solvent free, medium viscosity, urethane-modified, pre-reacted membrane system based on acrylic monomers.
Deckshield Repair Mortar	1–40 mm	A polyurethane mortar/screed to use on damaged floors, joint arises or as a thin layer topping underlayment for Deckshield resin finishes.



Isocrete Floor Screeds

SYSTEM NAME	THICKNESS	DESCRIPTION
Isocrete 1500	0–20 mm	A fast drying, pre mixed, high strength and protein-free self-levelling cement-based flooring compound that can be applied both by hand or by pump. Designed for the all-purpose levelling of surfaces prior to the installation of floor finishes including carpet, vinyl, tiles or resin and where floor finishes need to be applied quickly. May be used as a screed to receive an epoxy resin finish in areas taking light traffic.
Isocrete 4000	0–50 mm	A protein-free and ultra fast drying premixed screed used where fast drying or thicker underlayment is required. Designed to fill holes or smoothing small areas prior to the installation of floor finishes including carpet, vinyl, tiles or resin.
Isocrete 5000	3–50 mm	A coarse, fast cure, quick-hardening, single component, pre mixed, cement-based screed used primarily to level concrete surfaces prior to final covering. Designed for levelling concrete floors, patching existing screeds and filling holes in a base where fast drying is essential.
Isocrete SL Base	3–50 mm	A protein-free, pumped and pre mixed self-levelling cement-based underlayment designed for use on unlevel concrete floors. A fast-drying levelling layer designed to receive a top screed or thick floor finish including carpet, ceramic tiles or wood block.
Isocrete SL Plus	3–30 mm	A pumped self-levelling, pre mixed and protein-free cement-based underlayment designed to receive thick-set commercial floor covering such as carpet, vinyl or wood. Designed as a fast-drying underlayment with good resistance to point loading and abrasion resistance - to receive various floor coverings.
Isocrete SL Renovation	20–50 mm	A cementitious, fibre reinforced, pre mixed and pumped self-levelling underlayment designed to renovate existing substrates to receive floor coverings. Designed to renovate existing floors in refurbishment projects. Can be installed on top of existing floor coverings.
Isocrete Flowscreed Industrial Top	5–30 mm	A fast drying, pump applied, cement-based floor topping for fast track renovation of concrete floors. Designed as a high strength floor topping to be used in conjunction with a seamless resin floor finish.
Isocrete K-Screed	40–100 mm	A semi-dry cementitious screed incorporating proprietary additives to produce an early drying, high strength screed for high traffic areas, combined with rapid installation, high speed construction and excellent moisture control. It may be laid bonded, unbonded or floating and may be used with proprietary underfloor heating and sound-proofing systems.
Isocrete K Screedfast	0–50 mm	A semi-dry cementitious screed incorporating proprietary accelerating, water reducing and shrinkage compensation additives to give a high early strength, rapid drying screed.
Isocrete Screedfast Flex	0–75 mm	A specially formulated polymer modified cement, manufactured from a combination of natural and recycled raw materials, free from Portland cement.
Isocrete Isopol SBR	10–40 mm	A styrene butadiene polymer latex modified wearing screed additive and bonding agent. It is used in conjunction with heavy-duty industrial flooring systems.
Isocrete Isogran	20–80 mm	A polymer modified granolithic wearing screed used in conjunction with medium-duty industrial and commercial flooring systems.

Flowchem Corrosion Protection

SYSTEM NAME	THICKNESS	DESCRIPTION
Flowchem VE RC	0.5–1 mm	A roller coat shrinkage compensated vinyl ester resin based coating system with excellent chemical and mechanical resistance. Ideal for protection of concrete walls, floors, kerbs, equipment bases, trenches and drains against aggressive chemicals, solvents and heavy duty mechanical plus thermal attack.
Flowchem VE SC	0.5–1 mm	A versatile spray applied shrinkage compensated vinyl ester resin based coating system with outstanding all round resistance properties. Ideal for protection of concrete and metal structures subject to continuous or occasional exposure to heavy duty chemical, thermal and mechanical attack.
Flowchem VE SL	3 mm	A horizontal self-levelling shrinkage compensated vinyl ester resin based floor screed system with excellent resistance properties. Ideal for protection of concrete floors and bunds against aggressive chemicals, solvents and thermal attack in medium to heavy duty areas.
Flowchem VE GL	2–3 mm	A hand or spray applied shrinkage compensated vinyl ester resin based glass fibre reinforced lining system with outstanding chemical, thermal and mechanical resistance. Designed for the protection of concrete and metal structures subject to continuous or occasional exposure to heavy duty chemical, thermal and mechanical attack.
Flowchem VE HD	5–15 mm	A heavy duty, horizontal trowel applied shrinkage compensated vinyl ester resin based screed system with chemical and mechanical resistance. Protects concrete floors, walls and bunds against aggressive chemicals, solvents and thermal attack.
Flowchem VE Honeycomb	10 mm	An insulating extruded polypropylene honeycombed board with conductive fabric faces, used with the Flowchem VE Honeycomb resin lining. Provides resistance to continuous or occasional exposure from heavy duty chemical, thermal and mechanical attack.
Flowchem VE ESD RC	0.25 mm	An anti-static roller coat “shrink-free” vinyl ester resin based coating with excellent chemical and mechanical resistance. Designed to protect concrete floors, walls, kerbs, equipment bases, trenches and drains against aggressive chemicals, solvents and heavy duty mechanical plus thermal attack.
Flowchem VE ESD HD	10 mm	An electrostatic dissipating screed system with outstanding chemical and mechanical resistance. Ideal for the protection of concrete floors and bunds against aggressive chemicals, solvents and thermal attack in medium to heavy duty areas.
Flowchem VE ESD GL	3 mm	An electrostatic dissipating shrinkage compensated vinyl ester resin based glass fibre reinforced lining system with outstanding chemical, thermal and mechanical resistance. Designed for the protection of concrete and metal structures subject to continuous or occasional exposure to heavy duty chemical, thermal and mechanical attack.




Ancillary Products & Wall Coatings

SYSTEM NAME	THICKNESS	DESCRIPTION
Aqualock Onecoat	0.25 mm	A solvent and water free, epoxy resin, liquid applied surface damp proof membrane designed to withstand moisture vapour from substrates.
Flowflex Joint Sealant	3 mm	A non-sagging, elastic sealant based on hybrid-polymers. Permanently elastic after total curing whilst still maintaining a high mechanical strength. Ideal for pedestrian walkways, warehouses, parking areas. It can be used in both indoor and outdoor applications.
PHS	-	An ultra low viscosity, solvent free liquid used to refurbish and re-strengthen failed cement/sand screeds by penetrating PHS into the defective screed, filling voids and bonding material together to provide a very high strength floor screed.
Isocrete M-Bond	-	A solvent free epoxy resin bonding agent for concrete or screeds. Isocrete M-Bond is a single coat bonding agent. A two coat application to provide a damp proof membrane as well as a bonder.
Isocrete M-Bond Extra	-	A two coat system that can be used not only as a bonding agent but also to provide a full damp proof membrane (DPM) between the concrete and screed. Ideal for use in shower areas where screeds are laid to falls incorporating a damp proof membrane.
Isocrete Primer	-	An acrylic emulsion based primer for Isocrete cement-based self-levelling screeds. Used for priming concrete and screed subfloors and impermeable surfaces prior to screed application.
Flowcem	2 mm	A unique epoxy modified thin self-levelling screed that acts as a surface damp proof membrane to allow for the early installation of moisture sensitive floor finishes.
Hydraseal DPM	0.5 mm	A liquid applied, solvent and water free, epoxy resin damp proof membrane designed to withstand moisture vapour from substrates.
Peran WW	0.15 mm	An epoxy paint for walls and ceilings that can be diluted with water for a gloss finish. It provides a coloured and hygienic sealer for light duty areas. Peran WW is solvent and nonylphenol free and its seamless application is used for painting floors, walls and ceilings indoors where surfaces are exposed to chemical and mechanical stress, and where there are stringent hygienic requirements.

Monodec Polished Concrete

SYSTEM NAME	THICKNESS	DESCRIPTION
Monodec Grande Lux	-	Monodec Grande Lux involves grinding and polishing of the existing concrete slab, with four levels of gloss available. Monodec Grande Lux showcases the natural beauty of the ballast in the existing concrete slab with a super glossy, light-reflective finish that offers excellent chemical resistance and does not mark when subject to rubber-wheeled traffic.

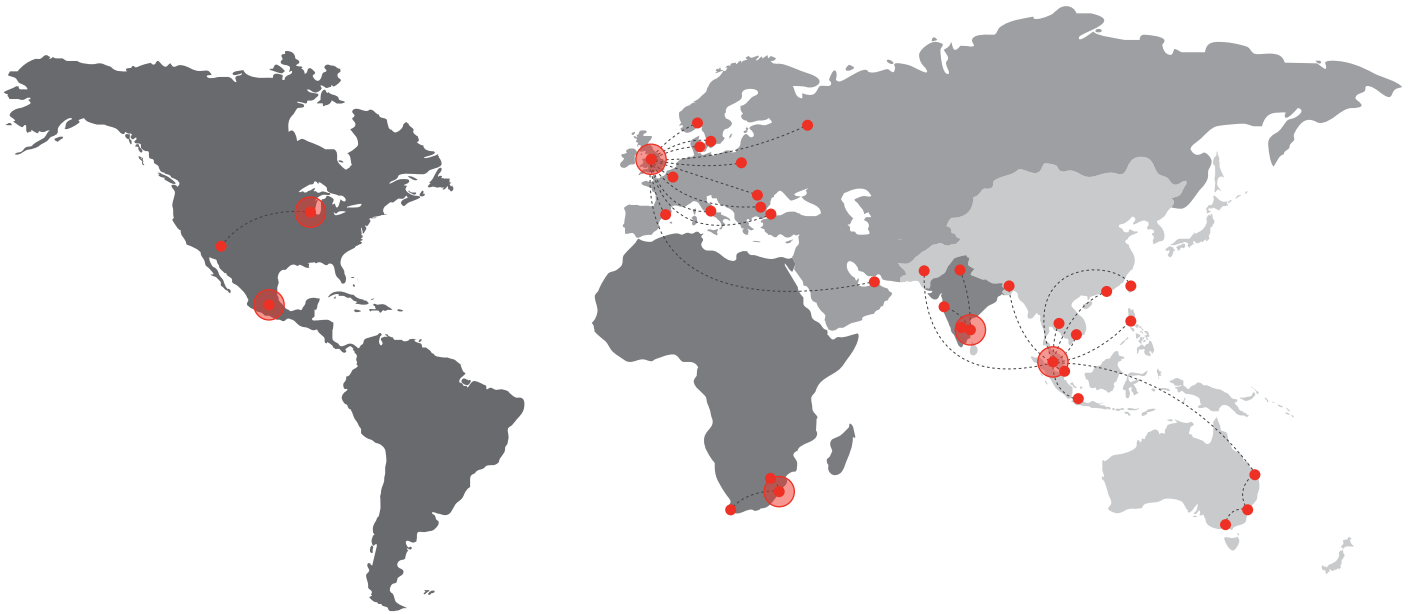

Flowcrete

World leader in seamless resin flooring solutions and other specialist coatings.

Africa

South Africa +27 31 701 0017 southafrica@flowcrete.com

Asia Pacific (APAC)

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+88 02 985 7222	bangladesh@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Malaysia	+60 3 6277 9575	asia@flowcrete.com
Pakistan	+60 3 6277 9575	pakistan@flowcrete.com
Philippines	+63 2 834 6506	philippines@flowcrete.com
Singapore	+60 3 6277 9575	singapore@flowcrete.com
Taiwan	+60 3 6277 9575	taiwan@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 28 6287 0846	vietnam@flowcrete.com

Europe & Middle East (EME)

Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 6486 0830	norway@flowcrete.com
Poland	+48 22 879 8907	poland@flowcrete.com
Romania	+40 766 596 991	romania@flowcrete.com
Russia	+7 916 931 3513	russia@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 212 2946570	turkey@flowcrete.com
UAE	+971 4 886 4728	uae@flowcrete.com
UK	+44 (0) 1270 753 000	uk@flowcrete.com

India

India +91 44 40176600 india@flowcrete.com

North America

Mexico	+55 44 40 94 00	mexico@flowcrete.com
USA	+1 513-943-4225	americas@flowcrete.com